


WAVASORB® FS

Advanced Flat Absorber

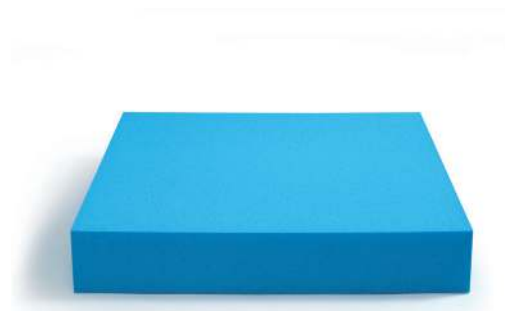

- WAVASORB FS is a series of flat, carbon-loaded, urethane-foam absorbers.
- Yielding sufficient performance in the operating frequency range from 100 MHz to 110 GHz for lining corners of anechoic chambers.
- Certified to all fire-retardancy and environmental specifications by containing an advanced chemical composition.
- Excellent power handling capability is assured.
- REACH- and RoHS-compliant, maintaining a healthy environment for operation.
- Designed and quality controlled using commercial and original simulating and test techniques.

WAVASORB® FS

E&C Anechoic Chambers has a fully automated manufacturing facility with CNC-controlled foam-cutting machines, computer-controlled impregnation, drying processes, and robotized painting to ensure stability of RF and fire-retardant performances.

Seventy years experience with absorber-manufacturing techniques provides consistency in chemical compositions, electrical and fire-retardant properties with uniform distribution.

E&C Anechoic Chambers can provide customized solutions to accommodate cleanroom requirements, flexible coatings and paintings to improve durability, and engineered pre-cuts and custom parts fit for equipment linings.

Perfectionism is our goal, with special attention to the dimensions and geometry of the individual absorber panels that enhance performance as well as optical appearance of the entire test facility.



Measurement Techniques

WAVASORB FS is manufactured in well-defined batches, and their reflectivity and fire-retardant properties are continuously monitored following internal ISO 9001 procedures.

Installation Methods and Chamber Validation

WAVASORB FS is bonded to metallic surfaces using WAVASORB Adhesive 13111. For easy exchange, modular installation techniques are available using Velcro fasteners or Plate & Rail mounting to achieve perfect geometry and alignment compatibility with any type of shielding.

Contrast colors are available in various types of paint and coating.

E&C Anechoic Chambers has developed VSWR Field-Probe measurement techniques for anechoic chamber validation, verifying the chamber performance at the system level.

Applications

WAVASORB FS is the preferred solution for the lining of corners and complex areas in Far-field, Near-field and Compact Antenna Test Ranges, Radar Cross Section (RCS) facilities, Electronic Warfare (EW) test ranges and wireless Over-The-Air (OTA) measurement systems. Sizes can easily be customized to fit any specific project area.


Characteristics

Standard Color	Blue (contrast colors available on request)
Operation Temperature	+5°C to +35°C
Humidity Range	30% to 70%
Frequency Range	100 MHz- 40 GHz
Fire-retardancy	NRL 8093 Tests 1, 2 and 3 DIN 4102-1 Class B2 ISO 11925-2 Class E UL-94/HBF ISO 4589-2
RoHS Compliant	According to 2011/65/EU
Reach Compliant	According to EC 1907/2006
Environmental AATCC 30-IV (2004)	IEC 60068-2-1 Test Ab
Quality Control	IEEE Standard 1128 ISO 9001
Product Life	20+ Years

Physical Properties

	Thickness (cm)	Nominal Weight (kg)
WAVASORB FS-50	5	1.5
WAVASORB FS-100	10	2.5
WAVASORB FS-150	15	4
WAVASORB FS-200	20	5

Standard Footprint: 61 x 61 cm

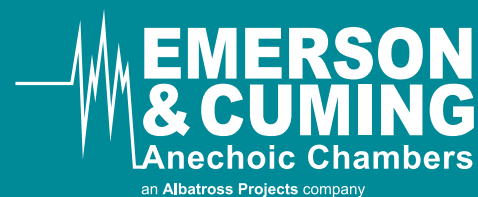

Related WAVASORB® Series



WAVASORB® VHP CO:
Coated Absorber



WAVASORB® HFX/HFS:
High Power Absorber



WAVASORB® VHP FL:
Walkable Floorabsorber



WAVASORB® VHP VE:
Ventilation Absorber



WAVASORB® VHP OD:
Outdoor Absorber

E&C Anechoic Chambers NV
Nijverheidsstraat 7A
B-2260 Westerlo
Belgium

Tel.: +32 14 59 58 00
Fax: +32 14 59 58 01

info@ecanechoicchambers.com
www.ecanechoicchambers.com

E&C Anechoic Chambers Asia Ltd
Flat/Rm 303, 3/F St. George's Bldg
2 Ice House Street, Central
Hong Kong

Tel.: +852 3972 2173
Fax: +852 3972 2211

jtsang@ecanechoicchambers.com
www.ecanechoicchambers.com

Albatross Projects GmbH
Daimlerstrasse 17
89564 Nattheim
Germany

Tel.: +49 7321 730 500
Fax: +49 7321 730 590

info@albatross-projects.com
www.albatross-projects.com

**Albatross Projects RF Technology
India Pvt. Ltd**
312, Siddhraj Zori, Near Sargasan Cross, KH-0,
Off S.G. Highway
Gandhinagar, 382421
India
Tel.: +91 79 3221 3399

info@albatross-projects.in
www.albatross-projects.de

**Albatross Projects RF Technology
(Shanghai) Co., Ltd.**
Block 35, No. 100 Baise Road
Inside Grand Skylight Gardens Hotel
200231 Shanghai
P.R. China
Tel.: +86 21 6434 1110
Fax: +86 21 6434 7800
info@albatross-projects.com.cn
www.albatross-projects.com.cn

AP Americas Inc.
1500 Lakeside Parkway, Suite 100-B
Flower Mound, TX 75028
USA

Tel.: +1 972 295 9100
Fax: +1 972 810 3223

info@apamericas.com
www.apamericas.com

BEST RESULTS FOR PIONEERING SUCCESS

think global



www.ecanechoicchambers.com

Safety Considerations: It is recommended to consult the E&C ANECHOIC CHAMBERS product literature, including material safety data sheets, prior to use E&C ANECHOIC CHAMBERS products. These may be obtained from your local sales office. Warranty Values shown are based on testing of laboratory test specimens and represent data that falls within the normal range of properties of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material or any use contemplated by the user and the manner of such use is the sole responsibility of the user who must assure that the material as subsequently processed meets the needs of this particular product or use. We base the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use which would infringe any patent or copyright.